

FORM PTO-1390 (REV. 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 302/1/013	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 09/869637	
INTERNATIONAL APPLICATION NO. PCT/GB99/04343		INTERNATIONAL FILING DATE December 22, 1999		PRIORITY DATE CLAIMED January 6, 1999	
TITLE OF INVENTION ULTRASONIC VISUALISATION SYSTEMS					
APPLICANT(S) FOR DO/EO/US Richard Peter GLOVER et al					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p>a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>a. <input type="checkbox"/> is attached hereto.</p> <p>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p>a. <input checked="" type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>d. <input type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</p> <p>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11 to 20 below concern document(s) or information included:</p> <p>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input checked="" type="checkbox"/> Other items or information:</p> <p>a) Form PCT/IB/308; b) Application Data Sheet; c) Form PCT/RO/101; d) Form PCT/ISA/210; e) Form PCT/IB/304; f) Form PCT/IPEA/408 dated 9/21/00 and response; g) Form PCT/IPEA/408 dated 1/15/01 and response; h) Form PCT/IPEA/409.</p>					

page 1 of 2

Certificate of Mailing By Express Mail Under 37 CFR 1.10Express Mail "Mailing Label No.": ET113243922USDate of Deposit: JULY 2, 2001

I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231 on JULY 2, 2001.

Richard M. Goldberg
(Name of Registered Representative
and person mailing)

Richard M. Goldberg July 2,
(Signature and Date) 2001

U.S. APPLICATION NO. 09/1/869637 INTERNATIONAL APPLICATION NO. PCT/GB99/04343		ATTORNEY'S DOCKET NUMBER 302/1/013	
21. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =		CALCULATIONS PTO USE ONLY <div style="border: 1px solid black; padding: 5px; margin: 5px auto; width: 80%;"> \$ 860.00 </div>	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		<div style="border: 1px solid black; padding: 5px; margin: 5px auto; width: 80%;"> \$ 0 </div>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	10 - 20 =	0	x \$18.00
Independent claims	1 - 3 =	0	x \$80.00
			+ \$270.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			
TOTAL OF ABOVE CALCULATIONS =		\$ 860.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.		<div style="border: 1px solid black; padding: 5px; margin: 5px auto; width: 80%;"> \$ 0 </div>	
SUBTOTAL =		\$ 860.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		<div style="border: 1px solid black; padding: 5px; margin: 5px auto; width: 80%;"> \$ 0 </div>	
TOTAL NATIONAL FEE =		\$ 860.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +		<div style="border: 1px solid black; padding: 5px; margin: 5px auto; width: 80%;"> \$ 0 </div>	
TOTAL FEES ENCLOSED =		\$ 860.00	
		Amount to be refunded:	\$
		charged:	\$

a. ☐ A check in the amount of \$ _____ to cover the above fees is enclosed.

b. ☒ Please charge my Deposit Account No. 07-1524 in the amount of \$ 860.00 to cover the above fees.
 A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
 overpayment to Deposit Account No. 07-1524 A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card
 information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR
 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

SIGNATURE

Richard M. Goldberg
 NAME

28,215
 REGISTRATION NUMBER

FILE 302/1/013

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT : Richard Peter GLOVER et al
SERIAL NO.: UNASSIGNED (PCT/GB99/04343) (WO 00/40156)
FILED : JULY 2, 2001
FOR : ULTRASONIC VISUALISATION SYSTEMS

Certificate of Mailing By Express Mail Under 37 CFR 1.10

Express Mail "Mailing Label No.": ET113243922US
Date of Deposit : JULY 2, 2001
I hereby certify that this paper and/or fee is being deposited with
the United States Postal Service "Express Mail Post Office to
Addressee" service under 37 C.F.R. 1.10 on the date indicated above
and is addressed to the ASSISTANT COMMISSIONER FOR PATENTS,
WASHINGTON, D.C. 20231 on JULY 2, 2001

Richard M. Goldberg
(Name of Registered Representative)
and person mailing

Richard M. Goldberg July 2,
(Signature and Date) 2001

PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS
BOX PCT
WASHINGTON, D.C. 20231

Dear Sir:

Prior to examination of the above-identified Application,
please amend the same as follows:

IN THE CLAIMS:

Amend claims 1-10 as follows:

1. (Amended) An IVUS system comprising:

a) a catheter having an ultrasonic transducer array
mounted at least near a distal end thereof;

b) a catheter interface module connected to a proximal
5 end of the catheter;

c) a display monitor;

0956367.0450
20570725550

d) a control device for controlling the system;

e) a signal processing data entry and data storage
device for processing and storing data derived from energization
10 of the ultrasonic transducer array to output a signal to the
display monitor in order to display an image of an interior of a
patient's body; and

f) a bed for supporting a patient;

g) the catheter interface module, the display monitor
15 and the control device are located adjacent to the bed such as to
be easily viewed and operated respectively by a clinician; and

h) the signal processing data entry and storage device
is located remotely from the bed at a sufficient distance to
enable a clear space around the bed for occupation by a medical
20 team so that the medical team can be adjacent to the patient.

2. (Amended) An IVUS system as claimed in claim 1 in which
at least one of the following is located remotely from the bed:

(i) a power distribution unit;

(ii) a video recorder; and

5 (iii) a video printer.

3. (Amended) An IVUS system as claimed in claim 1 in
which the display monitor comprises a flat screen monitor.

4. (Amended) An IVUS system as claimed in claim 1 in which
the control device incorporates a device to enable control

instructions to be given by voice and incorporates a voice
recognition device for accepting and implementing those

5 instructions.

5. (Amended) An IVUS system as claimed in claim 1 in
combination with an ultrasound system which employs a transducer
which in use is placed externally of the patient.

6. (Amended) An IVUS system as claimed in claim 1 in
combination with an X-ray system.

7. (Amended) An IVUS system as claimed in claim 1 in which
the control device includes an infra-red remote control device to
enable control instructions to be given from a position adjacent
the patient to remotely located units.

8. (Amended) An IVUS system as claimed in claim 1 in which
the display monitor is mounted on the catheter interface module.

9. (Amended) A method of arrangement components of the
IVUS system as defined in claim 1, which method comprises the
steps of:

a) locating the catheter interface module, the image
5 monitor and the control device adjacent the bed such as to be
easily viewed and operated respectively by a clinician; and

b) locating the signal processing data entry and data storage device remotely from the bed at a sufficient distance to enable a clear space around the bed for occupation by a medical team so that the team can be adjacent the patient.

10. (Amended) A method as claimed in claim 9, comprising the step of locating at least one of the following at a position remote from the bed:

- (i) a power distribution unit;
- (ii) a video recorder; and
- (iii) a video printer.

R E M A R K S

Claims 1-10 are now in this Application, and are presented for the Examiner's consideration.

The claims have been amended to provide proper antecedent basis, to remove the reference numerals and to positively recite the various elements and limitations in the claims. In addition, claims 1-10 eliminate all multiple dependencies. A marked-up copy of claims 1-10 is provided as an Appendix hereto.

In addition, Fig. 3 has been amended, as indicated in red on the attached copy herewith, to add numeral 13, which is found in the specification at page 4, line 15 and page 8, line 9. The Examiner is requested to approve this drawing change. A separate letter to the Official Draftsman is enclosed which requests approval of this drawing change.

In addition, the Abstract found on the front page of the published PCT application has been added on a separate sheet hereto.

Please charge any additional fees incurred by this Preliminary Amendment, or credit any overpayment, to Deposit Account No. 07-1524.

It is hoped that this Preliminary Amendment will facilitate an examination of the application on its merits.

Respectfully submitted,



Richard M. Goldberg
Attorney for Applicant
Registration No. 28,215

25 East Salem Street
Suite 419
Hackensack, New Jersey 07601
TEL (201) 343-7775
FAX (201) 488-3884

MARKED-UP COPY OF CLAIM AMENDMENTS

1. (Amended) An IVUS system [which comprises] comprising:

a) a catheter [(3)] having an ultrasonic transducer array mounted at least [or] near [its] a distal end thereof [an ultrasonic transducer array];

5 b) a catheter interface module [(4)] connected to [the] a proximal end of the catheter [(3)];

c) a display monitor [(12)];

d) a control device [(7,13,16)] for controlling the system;

10 e) a signal processing data entry and data storage device [(9)] for processing and storing [the] data derived from energization [energisation] of the ultrasonic transducer array to output a signal to the display monitor [(12)] in order to display an image of [the] an interior of a patient's body; and

15 f) a bed [(14)] for supporting a patient[; characterised in that:]

 g) [(i)] the catheter interface module [(4)], the display monitor [(12)] and the control device [(7, 13, 16)] are located adjacent to the bed [(14)] such as to be easily viewed
20 and operated respectively by a clinician; and

 h) [(ii)] the signal processing data entry and storage device [(9)] is located remotely from the bed at a sufficient distance to enable a clear space around the bed for occupation by a medical team so that [they] the medical team can be adjacent to
25 the patient.

2. (Amended) An IVUS system as claimed in claim 1 [characterised in that there is] in which at least one of the following is located remotely from the bed [one or more of the following]:

- 30 (i) a power distribution unit [(8)];
 (ii) a video recorder [(10)]; and
 (iii) a video printer [(11)].

3. (Amended) An IVUS [A] system as claimed in claim 1 [or claim 2] in which the display monitor comprises a flat screen monitor.

4. (Amended) An IVUS [A] system as claimed in claim 1 [any previous claim] in which the control device incorporates [means] a device to enable control instructions to be given by voice and incorporates a voice recognition [means] device for accepting and
5 implementing those instructions.

5. (Amended) An IVUS [A] system as claimed in claim 1 [any previous claim] in combination with an ultrasound system which employs a transducer which in use is placed externally of the patient.

6. (Amended) An IVUS [A] system as claimed in claim 1 [any previous claim] in combination with an X-ray system.

7. (Amended) An IVUS [A] system as claimed in claim 1 [any previous claim] in which the control device includes an infra-red remote control device to enable control instructions to be given from a position adjacent the patient to [the] remotely located
5 units.

8. (Amended) An IVUS [A] system as claimed in claim 1 [any previous claim] in which the display monitor is mounted on the catheter interface module.

9. (Amended) A method of arrangement [the component or units] components of the IVUS system as defined in [any of claims 1 or claims 2 to 8] claim 1 [when depending upon claim 1], which method comprises the steps of:

5 a) locating the catheter interface module [(4)], the image monitor [(12)] and the control device [(7, 13, 16)] adjacent the bed [(14)] such as to be easily viewed and operated respectively by a clinician; and

10 b) locating the signal processing data entry and data storage device [(9)] remotely from the bed [(14)] at a sufficient distance to enable a clear space around the bed for occupation by a medical team so that the team can be adjacent the patient.

10. (Amended) A method as claimed in claim 9, comprising the step of locating at least one of the following at a position remote from the bed [one or more of]:

ABSTRACT

In an IVUS system units are located outside or remote from the patient except for the display monitor (12), the catheter interface module (4) and the catheter (3) which are located adjacent the patient together with a control arrangement (13) to enable the said units to be remotely controlled from a position adjacent the patient.

20250410 14:50

Ultrasonic Visualisation Systems

Introduction to the Invention

The present invention relates to ultrasonic visualisation systems and more particularly to systems of the kind to which our United Kingdom patent 2,233,094 and United States patent 5,257,629 relate. Such systems will hereinafter be referred to as intravascular ultrasound systems or IVUS.

Such systems include various units such as a cathode ray tube monitor, an ultrasound processing unit, a power distribution unit, and possibly a video recorder (VCR), together with a video printer as well as the catheter to be inserted into the patient and a catheter interface module linking the catheter to the other units referred to.

It has been proposed to mount the above types of unit in a cart or trolley that can be manoeuvred into an appropriate position within the catheter laboratory or other relevant environment.

In such an arrangement the catheter and its associated catheter-interface-module (CIM), are not mounted on the cart or trolley because the catheter is to be inserted into the patient and the CIM would typically rest on or near the patient.

The floor area adjacent to the patient is at a premium because of the need to accommodate the medical team close to the patient. As a result, it is usually necessary to locate the cart or trolley some distance from the patient which in turn means that the display monitor has to have a reasonably large screen in order for the displayed image to be clearly visible to the clinician.

Summary of The Invention

The present invention is concerned with the physical location of such units of the system in order to improve the operating environment for the medical team.

According to one aspect of the present invention in an IVUS system the said units are located outside or remote from the patient except for the display monitor, the CIM and the catheter which are located adjacent the patient together with a control arrangement to enable the said units to be remotely controlled from a position adjacent the patient.

According to a first aspect of the present invention, the display monitor comprises a flat screen monitor such as a liquid crystal display.

Because the monitor can now be located much nearer to the patient it can be made much smaller and still provide the clinician with a clearly visible image.

According to a second aspect of the present invention, the control arrangement incorporates means to enable control instructions to be given by voice and incorporates voice recognition means for accepting and implementing those instructions.

According to a third aspect of the present invention, an IVUS system is embedded in a conventional ultrasound system which employs a transducer placed externally of the patient so that units of the conventional ultrasound system can also be employed in the IVUS system thus avoiding the duplication of those units. In other words, certain units are common to both the conventional ultrasound system and the IVUS system.

According to a fourth aspect of the present invention, the IVUS system is embedded in an existing X-ray system, again so that units common to both systems can be shared.

According to a fifth aspect of the present invention, the control

arrangement includes an infrared remote control device to enable control instructions to be given from a position adjacent the patient to the remotely located units.

According to a sixth aspect of the present invention, the monitor is mounted on the CIM unit.

Brief Description of The Drawings

Figure 1 is a perspective view of a known mobile cart or trolley of the kind already described;

Figure 2 is a perspective view of a combined display and catheter-interface-module according to the present invention;

Figure 3 is a diagrammatic representation of an IVUS embedded in a standard X-ray room according to the present invention;

Figure 4 is a block diagram showing an IVUS embedded in a personal computer according to the present invention; and

Figure 5 is a block diagram showing a single board IVUS embedded in an ultrasound system.

Detailed Description of The Preferred Embodiments

A cart or trolley 1 is provided with casters 2 by which it can be manoeuvred within a catheter laboratory or other relevant environment.

A catheter 3 for insertion into a patient, is connected to a catheter interface module 4 which in turn is connected by a cable 5 to the various units carried by the trolley 1.

These units typically comprise a cathode ray tube monitor 6 mounted on the top of the cart or trolley 1, a keyboard and trackball 7 for controlling the display on the monitor, a power distribution unit 8, an ultrasound

processing unit 9 (which could be a personal computer), a video recorder (VCR) 10 and an associated video printer 11.

The cart or trolley 1 typically comprises a framework 1a and a number of shelves 1b.

5 As discussed earlier, the cart or trolley arrangement shown in *Figure 1* would be located within the catheter laboratory or other relevant environment as close as possible to the patient without taking up floor space which would be needed by the medical team adjacent the patient. As a result the size of the screen of the monitor 6 has to be relatively large in
10 order to provide a clear and visible display to the clinician.

The essence of the present invention is the elimination of the trolley or cart 1 and the positioning at a remote location of most of the units normally carried by the trolley as shown in *Figure 1*.

The only units which would be located adjacent the patient are the
15 CIM 4, a display screen 12 mounted on the CIM 4, and a control panel 13 by which the various units making up the system can be controlled. The catheter 3 is of course close to the patient as it has to be inserted into the patient.

Because the screen of the monitor 12 is close to the patient and
20 therefore to the clinician, that screen can be much smaller than the screen of the known arrangement of *Figure 1*.

In fact, instead of comprising a cathode ray tube display, the monitor 12 could comprise a flat liquid crystal display or other type of flat screen display.

25 The control panel can be through a simple local control such as a trackball, joy stick or similar pointing device, combined with Windows based software, and be very small. Alternatively, the control can be mounted with

other control devices such as an X-ray gantry and bed controls.

To make control of the system easier a remote handset could be used. This could operate through an infrared link (or similar wireless communication), to the bedside unit, or directly with the processing hardware as an alternative where the room configuration demands it. This handset could provide all the controls required to run the IVUS system such as adjusting gain, image magnification etc, and replaces the slides and buttons of a normal IVUS system.

According to a further aspect of the present invention, the system control could make use of voice-recognition technology. Here the handset could be employed with links to the processing hardware. System generated speech could be employed to allow interaction between operator and system that would make the need for close observation of the display less important. Recognition of key words could allow any function to be activated etc. Text entry could be managed in a similar way.

The advantages of the arrangements according to the present invention, so far described, is that the processing hardware is now free of display and interface devices such as a keyboard, and can be made small enough to be positioned in a convenient place such as underneath the patient's bed.

Overhead monitors in the room can be used as an alternative or additional display.

Alternatively, it can be housed with the X-ray electronics in the X-ray control room, an arrangement of this kind being shown in *Figure 3*. The IVUS system can then make use of the standard peripherals such as printers and digital or video recorders already provided in the X-ray room. The processing hardware in the control room can also be provided with a

parallel set of operating controls to enable operation from outside the catheter lab, by a suitable operator, and a patient's details can be entered from this control room.

Referring to *Figure 3*, a patient's bed is indicated at 14 with the arrangement shown in *Figure 2* adjacent the bed.

The CIM 4 is connected to the IVUS computer 9 through an electrical connection 15 and a remote control joystick-type arrangement 16 is also connected to the computer 9 through an electrical connection 17.

All the other units required to make the IVUS system operative are already incorporated in the known standard X-ray equipment.

The data processing performed in an IVUS system consists of a series of discrete operations arranged in what is known as a pipeline. This means that the output of one process is the input of the next process. These processes can be arranged as separate modules, such as individual circuit cards, that are linked through a standard interface. An example of this is a set of dedicated cards that plug in to a peripheral component interconnect (PCI), computer bus. It then becomes possible to utilise commonly available standard cards or components to perform some of the non-IVUS specific processing such as data storage and archive, display drivers and power supplies. In this example the processing could be performed in a standard personal computer.

Figure 4 illustrates an embodiment of the IVUS processing modules.

In *Figure 4* those items which are equivalent to items already described with reference to *Figures 1* to *3* have the same reference numerals.

In *Figure 4* the overall personal computer arrangement is illustrated within the box 18.

7

Contained within the box 18 are the modules which are specific to the IVUS system and these are contained within the smaller box 19.

The modules which are within the box 18 but not within the smaller box 19 are those which could be standard items in many known imaging systems such as external ultrasound imaging systems.

These common units include a personal computer bus 20, a scan conversation module 21, a graphics card 22 and a unit such as a CD-ROM for storing data and archiving media 23. The modules which are specific to the IVUS system in box 19 comprise an analogue to digital converter module 24 which takes an analogue input 25 from the catheter-interface-module 4.

The output from the ADC 24 is raw digital data 26, which is input to a digital signal processing card 27 which is concerned with focusing and beam forming.

The card 27 is interconnected with a data store 28 which itself is also interconnected with the module 23.

With this arrangement one module 24 performs all of the data-capture operations and also undertakes the interface with the catheter-interface-module 4.

A second module 27 undertakes the intensive numerical calculations required to focus the received data signals. This is typically a focusing and noise reduction operation.

The output from 27 would typically be digital and have a much lower bandwidth than the input to this module. This output consists of focused A-scans which can be temporarily stored in a local disk 28, and archived suitable removable media 23. Alternatively, the output of module 21 can be stored and archived using a similar arrangement.

The module 21 performs scan conversion of the digital data to allow representation of it on raster-scanned display devices such as conventional computer monitors or video screens.

This operation is similar to the interpolation and zoom functions found in many imaging modalities.

The IVUS modality can therefore be incorporated into another imaging modality by utilising the following components:

- (i) catheter-interface-module and display 4, 12
- (ii) control device 13
- (iii) data acquisition module 24
- (iv) digital processing module 27
- (v) it may be necessary to also incorporate a scan conversion card 21 into the box 19.

In a further aspect of the present invention, and in particular of the processing hardware, the digital processing function could be incorporated into the IVUS data acquisition module.

This would employ custom digital chip design techniques resulting ASICs or FPGAs to embed the processing operation. An example of which is synthetic aperture processing.

The system could then consist of a single module that can be incorporated into another imaging modality such as conventional external ultrasound. The same technique could also be used in standard computer systems to provide IVUS.

Figure 5 illustrates an embodiment of such an arrangement. Where those units or components which correspond with ones already described and illustrated have the same reference numerals.

A conventional external ultrasound has a transducer 29 the output

signal of which inputs to a transmit/receive module 30 which in turn inputs to an analogue to digital converter (ADC) 31, which in turn inputs to a digital beam former 32. In parallel the IVUS system takes the signals from the transducers at the distal end of the catheter 3, passes them through the catheter-interface-module 4 and the combined ADC and focusing/beam forming module 24-27, the output of which is common with the output from the digital beam former 32, both of which input into the scan converter 21 followed by the graphics memory 22 and the display 12.

The dotted line 33 indicates the single board comprising essentially an IVUS system embedded in a known conventional ultrasound system.

Claims

1. An IVUS system which comprises:

- 5 a) a catheter (3) having mounted at or near its distal end an ultrasonic transducer array;
- b) a catheter interface module (4) connected to the proximal end of the catheter (3);
- c) a display monitor (12) ;
- d) a control device (7, 13, 16);
- 10 e) a signal processing data entry and data storage device (9) for processing and storing the data derived from energisation of the ultrasonic transducer array to output a signal to the display monitor (12) in order to display an image of the interior of a patient's body;
- 15 f) a bed (14) for supporting a patient;
- characterised in that:
- (i) the catheter interface module(4), the display monitor (12) and the control device (7, 13, 16) are located adjacent to the bed (14) such as to be easily viewed and operated respectively by a clinician; and
- 20 (ii) the signal processing data entry and data storage device (9) is located remotely from the bed at a sufficient distance to enable a clear space around the bed for occupation by a medical team so that they can be adjacent to the patient.
- 25

2. An IVUS system as claimed in claim 1 characterised in that

11

there is located remotely from the bed one or more of the following:

- (i) a power distribution unit (8);
- (ii) a video recorder (10);
- (iii) a video printer (11).

5

3. A system as claimed in claim 1 or 2 in which the display monitor comprises a flat screen monitor.

10

4. A system as claimed in any previous claim in which the control device incorporates means to enable control instructions to be given by voice and incorporates voice recognition means for accepting and implementing those instructions.

15

5. A system as claimed in any previous claim in combination with an ultrasound system which employs a transducer which in use is placed externally of the patient.

20

6. A system as claimed in any previous claim in combination with an X-ray system.

25

7. A system as claimed in any previous claim in which the control device includes an infra-red remote control device to enable control instructions to be given from a position adjacent the patient to the remotely located units.

8. A system as claimed in any previous claim in which the display monitor is mounted on the catheter interface module.

9. A method of arranging the component or units of the IVUS system as defined in any of claims 1 or claims 2 to 8 when dependant upon claim 1 which method comprises:

- 5 a) locating the catheter interface module (4) the image monitor (12) and the control device (7, 13, 16) adjacent the bed (14) such as to be easily viewed and operated respectively by a clinician; and
- 10 b) locating the signal processing data entry and data storage device (9) remotely from the bed (14) at a sufficient distance to enable a clear space around the bed for occupation by a medical team so that the team can be adjacent the patient.

10. A method as claimed in claim 9 comprising locating remote from the bed one or more of:

- 15 (i) a power distribution unit (8);
- (ii) a video recorder (10);
- (iii) a video printer (11).

1/3


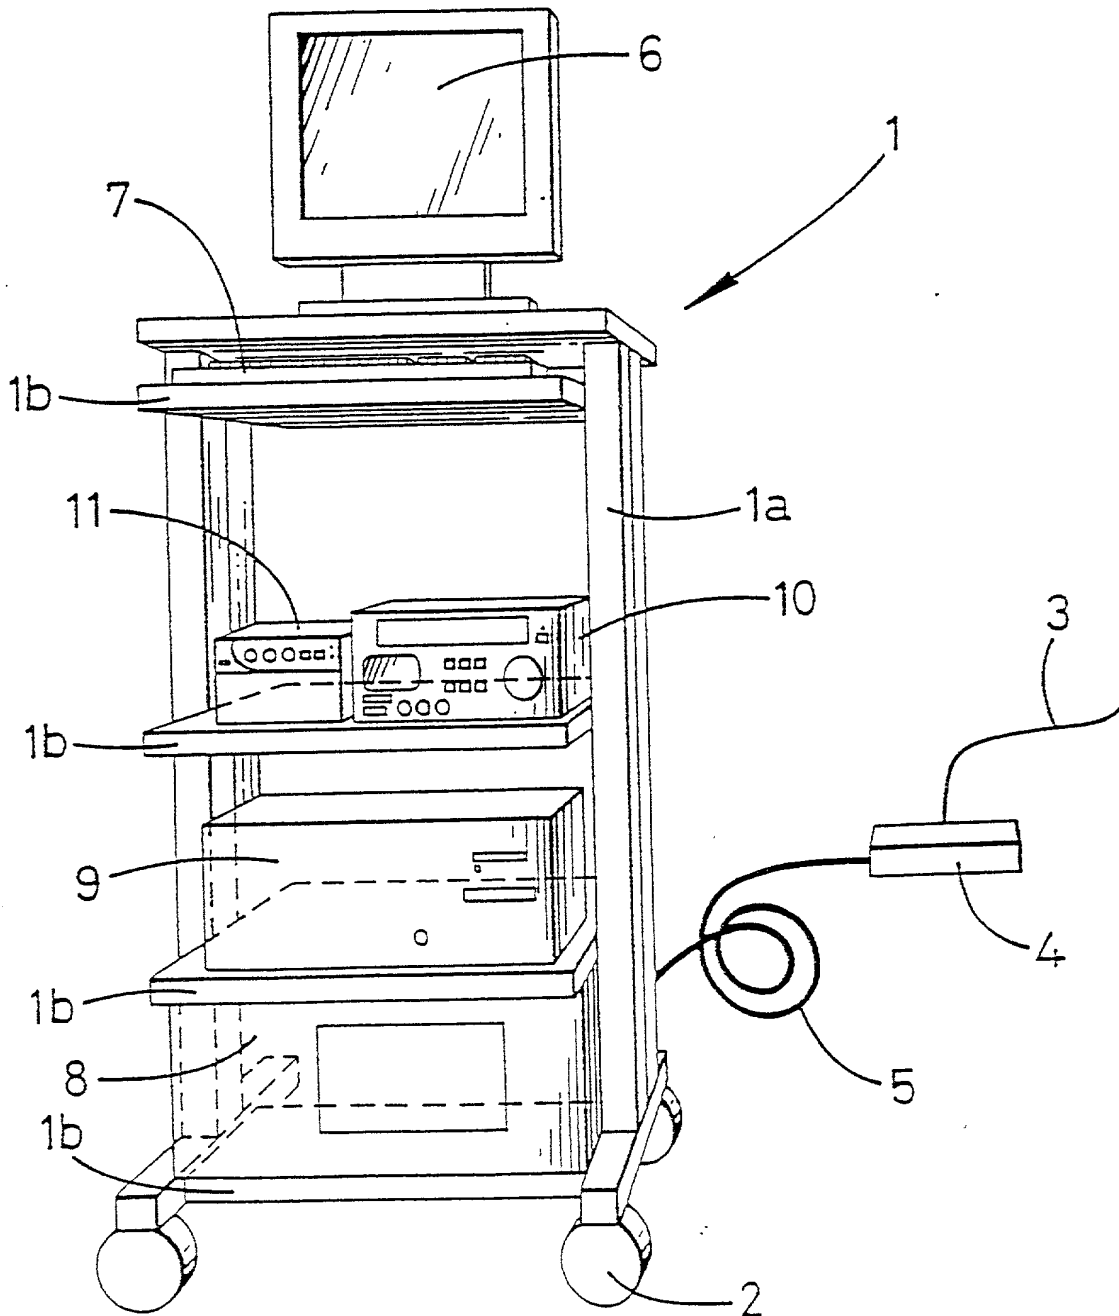


FIG. 1

2/3

FIG. 2

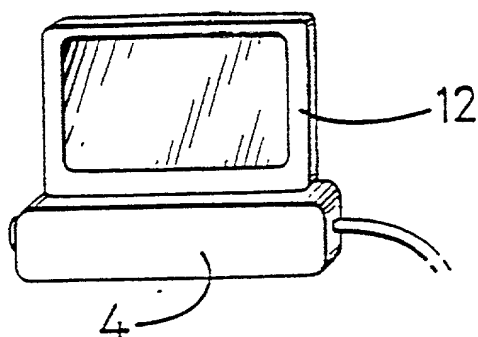

IVUS EMBEDDED IN X-RAY ROOM


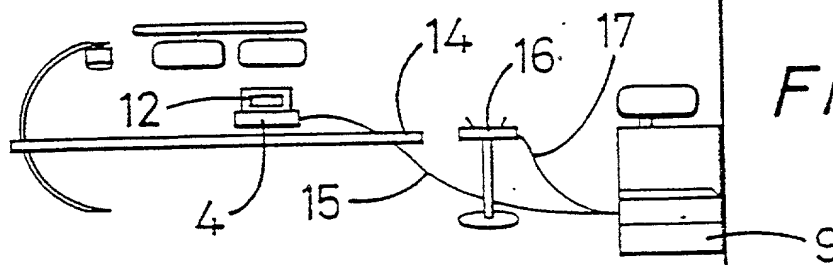


FIG. 3

KEY IVUS SPECIFIC COMPONENTS

FIG. 4

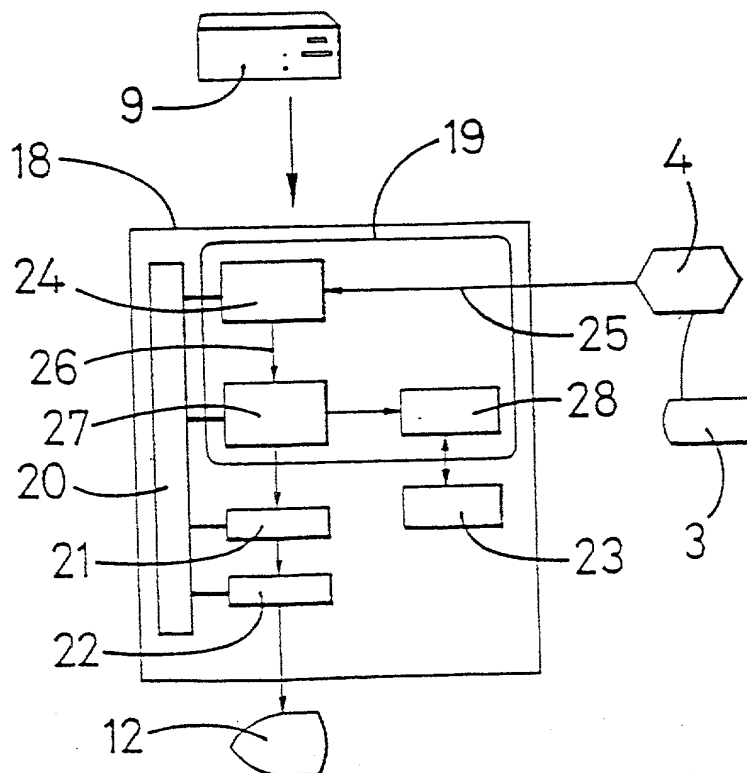

18

-19

4

24

25

26

27

28

20

21

23

22

3'

12

3/3

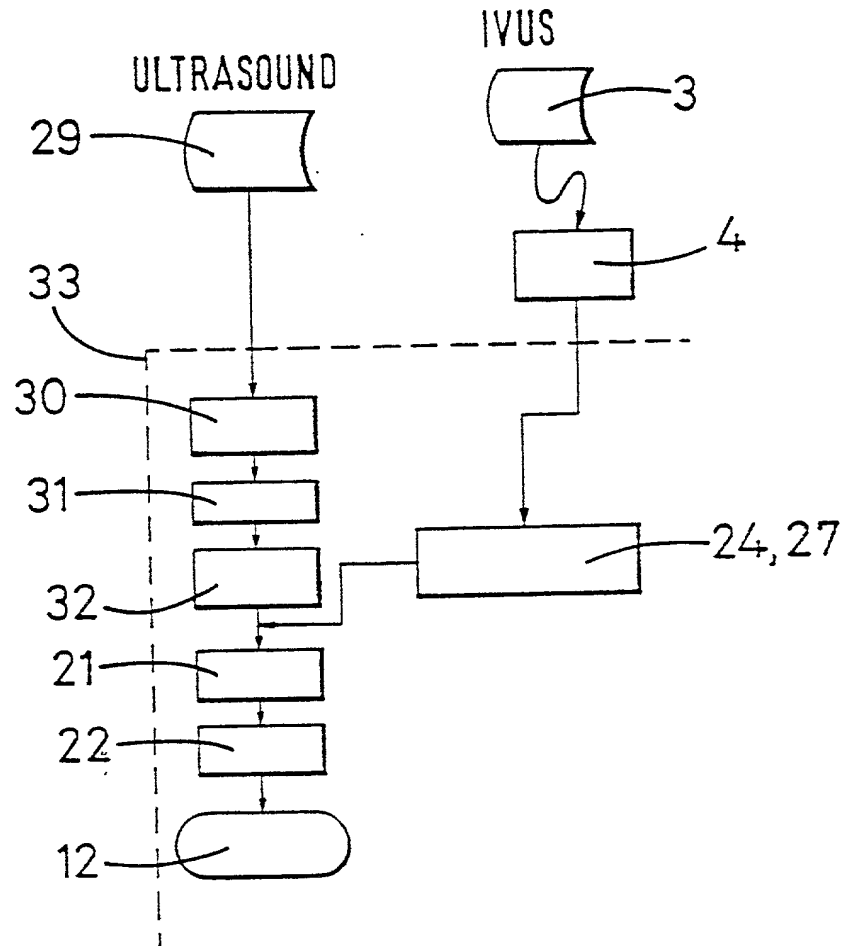


FIG. 5

ATTORNEY'S DOCKET NO.
302/1/013

SIGNATURE OF INVENTOR 201 <i>R. Glover</i>	SIGNATURE OF INVENTOR 202 <i>ADK</i>	SIGNATURE OF INVENTOR 203 <i>R. G. Dickinson</i>
DATE 21-12-2001	DATE 8th January 2002	DATE 3 Jan 2002